


Scan here to view our products on



A2

Elements

Overlapping Cassette Panels Rainscreen System

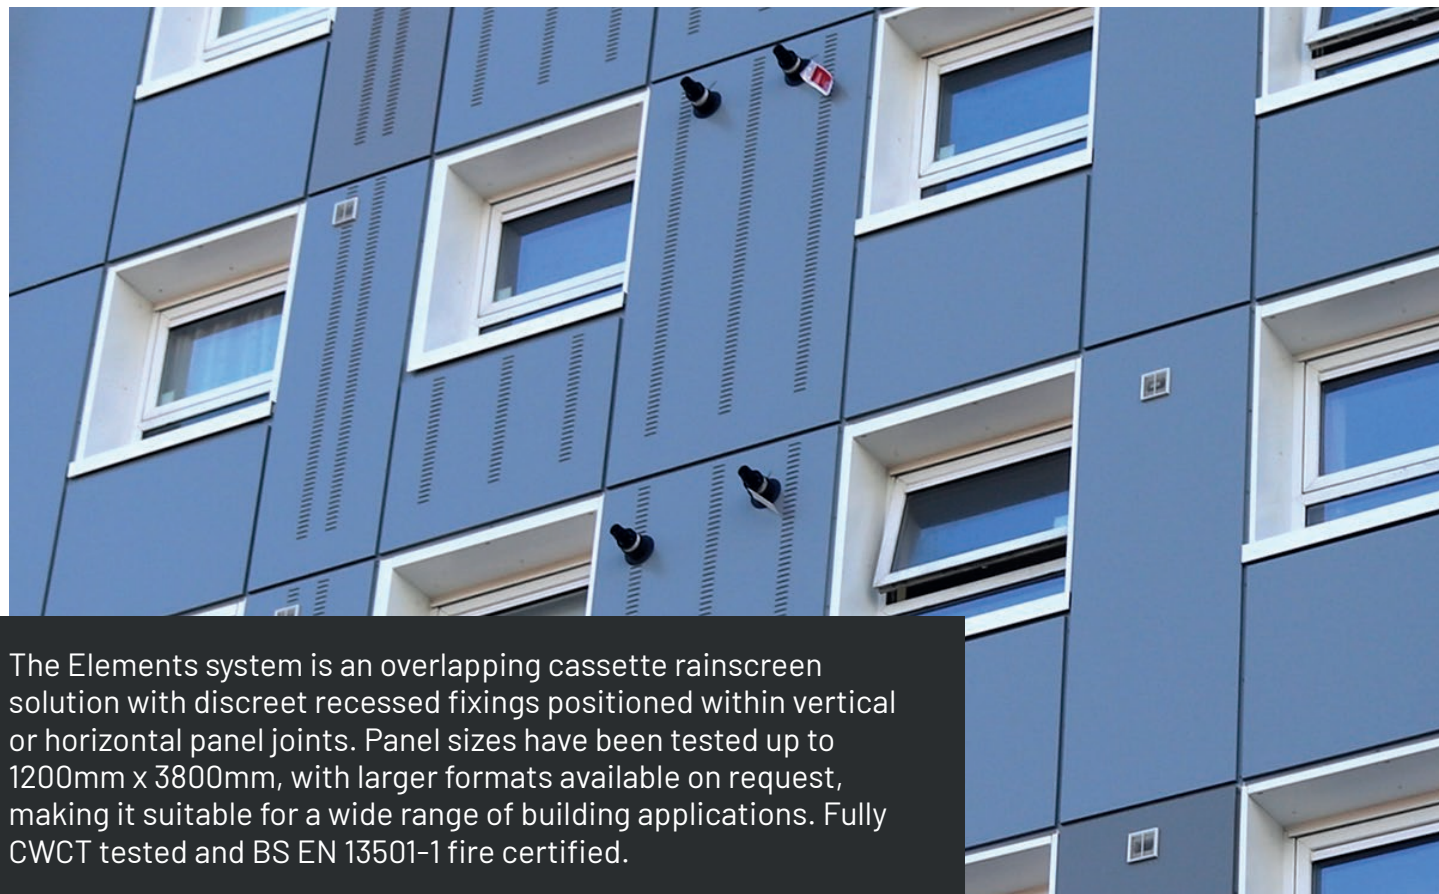

The Elements system is an overlapping cassette rainscreen solution with discreet recessed fixings positioned within vertical or horizontal panel joints. Panel sizes have been tested up to 1200mm x 3800mm, with larger formats available on request, making it suitable for a wide range of building applications. Fully CWCT tested and BS EN 13501-1 fire certified.



FEATURES AND BENEFITS:

- **Concealed fixings:** No visible fixings, giving a seamless smooth facade
- **Fire Safety:** Tested to BS EN 13501-1 standards
- **Fully Customisable:** Sizes available up to 1200mm x 3800mm, larger formats available on request
- **CWCT Tested:** Tested for resistance to water, air, and impacts
- **Time and Cost savings:** Simple Fast Installation leading to reduced fixing times on site, reducing labour costs
- **Versatile:** Panels that are suitable for new or re-clad projects or commercial or residential buildings

FINISH
Facades



0121 803 1900



estimating@finishfacades.co.uk



[/finish-facades-ltd](https://www.linkedin.com/company/finish-facades-ltd)

CERTIFIED FIRE PERFORMANCE

- Tested and classified in accordance with BS EN 13501-1:2018.
- Meets rigorous reaction to fire standards (EN 13823:2020) for building products.
- Measures the gross heat of combustion for safety assurance (BS EN ISO 1716:2018).
- Designed to provide reliable fire performance without compromise.
- Ideal for high-specification construction projects.
- Compatible with a wide range of modern building systems.



CWCT TESTED PERFORMANCE:

Conducted in accordance with CWCT 'Standard for Systemised Building Envelopes', 2006.

- ✓ Air Permeability – ensures minimal air leakage.
- ✓ Watertightness – tested under static and dynamic conditions.
- ✓ Wind Resistance – verified for serviceability and safety.
- ✓ Impact Resistance – tested for both soft and hard body impacts.

Guarantees durable, safe, and high-performance façades.



Polyester Powder Coated Finish	Type of Product/Layer Reference	Polyester Powder Coated Finish
	Thickness	60 - 120 microns
	Application Rate	0.09-0.18 kg/m ²
	Colour	Any
	Construction Form	PPC Applied to the Front of the Aluminium Panel
Aluminium	Type of Product/Layer Reference	Aluminium
	Thickness	3mm
	Colour	Metallic
	Construction Form	Aluminium Panel